



ISSN: 2321-2152

IJMECE

*International Journal of modern
electronics and communication engineering*

E-Mail

editor.ijmece@gmail.com

editor@ijmece.com

www.ijmece.com

Remote Monitoring of Off-Grid Renewable Energy

B.HARI, T.RAMANNA, U SRIKANTH, BANOTHU BIXAPATHI

Abstract - Off-grid renewable energy technology (RET) performance can be better understood to increase the viability of such systems. With numerous configurations and uses being investigated, the technology for remote monitoring of RET deployments in poor nations are encouraging. The most recent remote monitoring initiatives in Malawi, Gambia, and Zambia are discussed along with their advantages and disadvantages. Along with various theoretical directions of the technologies, the capacity of remote monitoring apps to increase the sustainability of off-grid RET is investigated.

Keywords—remote monitoring, renewable energy, off-grid, appropriate technology, mini-grid, sustainability, solar PV

INTRODUCTION

The UN Secretary General Ban Ki-Sustainable Moon's Energy for All (SE4ALL) initiative, which aims to: 1) ensure universal access to modern energy services, 2) double the global rate of improvement in energy efficiency, and 3) double the share of renewable energy in the global energy mix, was launched in 2012 and has helped to accelerate international momentum toward the development of renewable energy [1]. The main grid's reinforcement and expansion, together with the addition of more generating stations to satisfy rising demand, have been the focus of power sector development for emerging nations in Sub-Saharan Africa (SSA) [2]. Despite this emphasis, significant gaps persist. Overall, electrification rates in SSA are 64% and 13% for urban and rural populations [3]. Table I presents the electrification rates of the case study countries [3], [5].

TABLE I

ELECTRICITY ACCESS IN CASE STUDY COUNTRIES

Region	Urban electrification rate %	Rural electrification rate %
Gambia	60	30
Malawi	35	2
Zambia	48	2

This paper argues that applying available communication technologies has the potential to improve the contribution of rural off-grid RETs by providing data on the technical system performance and by opening up potential for remote control. The case studies in this paper present some of the expected and realized benefits of different configurations of remote monitoring systems (RM). A brief description of the need for improved evidence and learning in rural electrification projects is provided in section II. Sustainability issues common in rural off-grid RET systems are set out in Section III along with a literature review of recent RM deployments in developing countries and a theoretical discussion of the value of RM in addressing sustainability issues.

ASSISTANT PROFESSOR^{1,2,3}, STUDENT⁴

Department of EEE

Arjun College Of Technology & Sciences

Approved by AICTE & Affiliated to JNTUH

SPONSORED BY BRILLIANT BELLS EDUCATIONAL SCOTTEY

Case studies of recent and ongoing deployments of RM are presented in section IV. The paper concludes with a discussion on how the case studies address sustainability, their strengths and weaknesses, and future directions will be discussed.

NEED FOR AN IMPROVED EVIDENCE AND LEARNING OF RURAL ELECTRIFICATION PROJECTS

The IEA predicts a requirement of nearly USD \$1 trillion to realize universal electricity access by 2030, however SE4ALL has secured only 3% of this at present [3]. Universal access would be achieved through expansion of main grids supply to power all urban centers and 30% of the rural areas, while the remainder is split between mini-grids (65%) and stand-alone off-grid installations (35%). Practical action projects 55% of additional electricity access will be through off-grid and minigrid systems [6]. In SSA, national electrification plans have ambitious targets for future access. Zambia's Rural Electrification Master Plan aims to spend USD\$1.1 billion by 2030 to achieve 51% electrification [8]. In Malawi, the rural electrification strategy is defined by the Malawi Rural Electrification Programme (MAREP) that has the aim of increasing access to electricity to 30% of the population by the year 2020. Even successful rural electrification programs can take decades to achieve high access rates [9]. A contributor to this delay is the lack of oversight and subsequent dearth of evidence created on the success of the portfolio of projects (as cited in a recent evaluation in Malawi [10]). Availability of evidence and adequate analysis of the impacts of rural electrification interventions appears also to be limited more generally [4]. Indeed, Bernard [7] reports that while funding for RE programs continues, very little empirical evidence is available to justify their supposed level of impact. The poor sustainability of off-grid RET projects is discussed in the following section. Clearly, it is vital to generate evidence for learning on what factors of sustainability must be addressed, and their relative importance in different local contexts to avoid repetition of failures and to improve future deployments.

Remote monitoring and sustainability issues

Rural off-grid RE technology sustainability challenges

It is acknowledged that off-grid decentralised RET solutions are technically possible for providing energy services to the rural poor while having little of an adverse effect on climate change [11]. Off-grid alternatives also have the benefit of serving as a stopgap remedy while communities wait for the main grid to reach them, a process that could take many years, if it ever does [4]. Off-grid alternatives can be considered to be more egalitarian and to reach the poorest most directly because grid extension favours the relatively less poor rather than the poorest. Pico sized solar PV lanterns, which are tiny LED lights with a small solar cell and rechargeable battery integrated into one unit, are one type of off-grid electrical RET. such as at the Bondo micro-hydro 75kW scheme coming online in 2013 in Malawi. Mid-scale installations are often targeted at homes, schools and health centers using either solar PV or wind generation.

A standard system would consist of a solar panel array (or wind turbine), charge controller, 12-volt lead acid battery array, efficient lighting and an inverter for AC power. Various sources have provided guidelines to improve sustainability of off-grid RETs [12], [13] for the following areas of sustainability: community ownership and engagement, technical, economics, institutional, and social. Although the focus of RM in this paper concerns primarily technical sustainability issues, the importance of each pillar of sustainability cannot be overstated. Socially, engagement with community stakeholders and the requirement of evidence of community buy-in ensures that the entire community is represented, including vulnerable groups. Institutionally, the government has a role to play to support the private market development of off-grid rural energy solutions – one of the many policy measures supporting the sector as a whole. Weak policies that fail to promote key off-grid RET (i.e. tariffs on solar PV) can prevent projects from even starting, whereas a hands-off tariff policy, such as occurred intermittently in Kenya in the past 30 years, have

allowed for comparable solar PV rates of dissemination as in South Africa [14]. Economically, innovative financing techniques are sometimes needed to provide initial access and ongoing service. Examples of this include longerterm repayment schemes with minimal upfront fees, groupbased financing, and flexible repayment option for non-regular incomes (see [15] for a detailed study on financing challenges for world's poorest). While further research is needed to explore the role of these issues and their cross-linkages other sustainability pillars, the literature and case studies presented in this paper identify an encouraging role of RM for technical sustainability. The key technical sustainability issues identified are set out below:

- Lack of standardization of technical design, which can lead to systematic failure of a component.
- Scaling of the project should be influenced by a forward-looking needs analysis. As demand grows (especially with a rigid pricing system), systems can be overused when the system reaches its limits.
- Developing a long term maintenance strategy of these systems, deployed in remote areas of developing countries, will require the building of significant technical capacity
- Lead acid station batteries need to be cared for properly and their durability can be overestimated, failing surprisingly sooner than expected.
- The system must be designed with the skill set of the operators and repair technicians available. When failure occurs, it can be impossible to find technicians to repair complicated systems.
- Determination of the system fault cannot be taken for granted as the available data (often elicited from nontechnical system users) may not be sufficient to assess the problem without a detailed site survey.

Value of Remote Monitoring for off-grid RE

When considering RM solutions for off-grid electrical installations in developing countries, cellular networks are the main communications infrastructure available. Cellular networks have experienced huge growth in Africa, estimated at 44% since the year 2000 with the 2011 estimate of mobile phone subscriptions 648.4 million [16][17]. With these cellular networks matching and even surpassing the functionality and coverage of

networks in developed countries, data transfer is now feasible in a simple text format via SMS or with varying bandwidth of internet connection via GPRS, 2G and 3G. A growing body of literature is available on configurations and uses of RM and wireless sensor networks (WSN) for development projects. Some uses include Pathan et al. [18] who propose a system for flood control and warning and Mafuta et al [19], who demonstrate an irrigation management system with WSN. While these examples exist outside of energy projects, the technology is transferrable and demonstrates the application of modern communications technology in developing countries. The sustainability of off-grid RET systems faces several challenges, as highlighted in earlier sections. Intuitively, RM technology offers functionality that could help address some of these challenges. In particular, technical sustainability relies on a viable operations and maintenance strategy. Faults have to be identified, reported and rectified in a timely and efficient manner. In remote rural communities the amount of input required to achieve the necessary skill sets is a significant, timeconsuming exercise that may take many years. In addition, there is a pressing need to address the maintenance issues facing systems built in the interim period until an adequate level and standard of indigenous skill base is established. RM technology can service these immediate maintenance requirements. RM can support RET technicians and engineers in fulfilling a maintenance agreement following the original installation. Time based maintenance with such stretched technical resource is impractical, where the time and cost of attending remote locations represents a significant overhead, which often undermines the longevity of these installations. RM can enable technical support to optimize its effort and resources by targeting those installations in most need. Reliable and current data on system health can be captured and supported by RET technicians as described for rural schools and home SHS systems [20].

CASE STUDIES IN MALAWI, GAMBIA, AND ZAMBIA

Three recent and ongoing case studies are selected and presented below in order to contrast various approaches and to provide some evidence of the various roles RM has in off-grid RE projects. The first case study is part of the Malawi Renewable Energy Acceleration Programme [22]. MREAP is funded by the Scottish Government with the objectives of: 1) Improved enabling environment and evidence-based policy for RET in Malawi, and 2) Increased poor Malawian communities accessing

modern energy services. The second case study is from the charitable Gambia Solar Project, operated from the University of Strathclyde's Electronic and Electrical Engineering Department, which has electrified eight remote schools and two health clinics. In addition to the Gambia Solar Project the University of Strathclyde has introduced a Vertically Integrated Project (VIP) into the undergraduate student curriculum that focuses on 'Sustainable Energy for Development'. As part of this initiative a RM unit has been designed and a prototype built that is set for deployment on solar installations in the Gambia. The final case study is based on recent field test in Zambia of a 160Wp micro-wind turbine [23] which implemented an affordable monitoring approach. The project was led by Seattle University, Engineers Without Borders – Seattle Chapter and the IEEE PES Community Solutions Initiative. The wind turbine project objectives were twofold: 1) to evaluate the technical field performance of off-the-shelf wind turbines currently available in U.S. market, and 2) to estimate wind resource at the particular installation location.

Malawi - Channelling Remote Monitoring Data to multiple stakeholders

Additional to the delivery of community based RET projects, MREAP includes a work package to deploy and test a RM system. The test sites for this RM system are PV installations deployed in the rural district of Chikwawa. The remote monitoring aspect of MREAP is intended to both gather technical monitoring data to allow assessment of system performance and technical sustainability and also to investigate the viability of technical RM as a key component of the operations and maintenance strategy for any large-scale deployment of RET in Malawi. By implementing both research and monitoring and learning frameworks across the programme, MREAP intends to gather data across a set of key learning topics and synthesize and disseminate evidence on 'what works where and for who' regarding RET in Malawi. In order to report the performance parameters of the PV system, the RM system will use a cellular network as a bridge between Remote Station (RS) and a Central Monitoring Station (CMS). Specifically, the system will capture PV array voltage, charging current, battery voltage, load current, ambient temperature, and solar radiation. These parameters will be gathered at predetermined intervals then stored locally before transmission to the database of the CMS.

Accordingly, the system will alert the management personnel in case of any mishaps in the PV system or itself.

Distant Station (RS)

The Wireless Sensor Network (WSN)-equipped PV installation will make up the RS. Open-source approaches offer significant cost, customisation, and independence from a single entity advantages over proprietary solutions. Therefore, an Open WSN node will serve as the foundation for the RS. In particular, delivery uses the Wasp mote node by Labellum [24]. This node can be powered by a lithium battery which can be recharged through a dedicated socket for the solar panel. This option will make the RS independent of the PV system, hence, permitting a seamless operation of the RS in terms of reporting the PV performance parameters to the CMS regardless the healthy status of the PV system. As shown in Fig. 1, several RSs will be able to communicate with the CMS via the cellular network. Each RS will have at least one main station which will be processing and aggregating data from far-off sub-stations. However, where the distance between individual PV stations exceeds a 100m limit and where a line-of-sight communication mode between sensor nodes is not feasible, independent RSs will be installed at a single site as shown in RS 2 in Fig. 1, but at the expense of additional running costs in terms of SMS charge

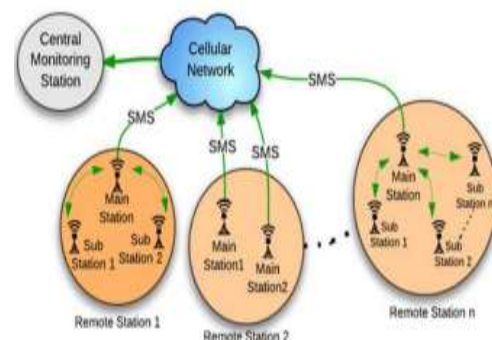


Fig. 1- Remote Monitoring system architecture showing several Remote Stations

In addition to the RM system being scalable in terms of the number of RSs that can be integrated, the RSs themselves are also flexible in terms of the number of sensors that can be added. The architecture of the main station node in the Rescan

can be configured to incorporate various sensors including current, voltage, solar radiation, and temperature sensors. A ZigBee module will be used to receive data from sub-stations within its locus. Furthermore, this node will be equipped with a GPRS module for sending SMSs to CMS. The load current sensor will be used to investigate the loading condition of the PV system. Specifically, any system overload will be reported to the monitoring personnel. On the other hand, during the day a low battery voltage and no charging current report will imply that either the charge controller or the PV array is faulty. However, the PV array voltage sensor will indicate if indeed the PV array is faulty; in this case the defective device will obviously be the charge controller. With this arrangement the monitoring personnel will be well informed in real-time of the type of system fault that will have occurred and hence promptly conduct the specific maintenance work.

Central Monitoring Station (CMS)

The CMS is the heart of the RM system. This will aggregate and process data received from all RSs and will have up to three parts. The first part is the monitoring personnel who will receive fault alarms directly onto their mobile phone for prompt reaction to the particular PV system. The alarms may come directly from RSs or from the server housed in the CMS. The second part is the server which is a computer equipped with a broadband dongle. This part will be used to receive, store and display both current and historical performance data of all PV systems. The third section is the internet connectivity which will allow the system performance data to be accessed across the globe.

Gambia - Making Ambassador Projects More Sustainable

Experience from the Gambia Solar Project along with other charitable organizations, NGOs and local communities in the area, has demonstrated that there is a requirement for immediate support of off-grid energy systems in order to ensure that they continue to operate effectively for the duration of the system's lifecycle. Data collated from a RM unit can enable local support for system management, maintenance and operation. Through the University of Strathclyde's Gambia Solar Project and student led VIP on 'Sustainable Energy for Development' a RM unit has been designed and a prototype is set for deployment on solar installations in the Gambia.

This project uses 2G mobile networks to transmit data back to a web server database that can be accessed with a clear and user-friendly data interpretation by web applications (including android). While many other projects use a local base station to receive data and update a web application, using the proposed approach simplifies the hardware required in country and the system implementation. RM systems are intended to improve the availability and reliability of the energy system they serve; therefore, the complexity of the RM system should not compromise its own reliability. In addition, removing the cost of running and maintaining a local base station means that the overall cost of remote condition monitoring can be lowered, making it more viable to developers and users. This is possible over the 2G networks available, albeit at a lower speed and bandwidth than is used for other applications. The amount of data to be gathered and sent is relatively small compared to media streaming for example, so there is no need for high speed and bandwidth 3G or 4G networks. However, GSM networks are well developed in The Gambia as with most SSA countries, (Fig. 2.) ICT and particularly mobile internet are a major growth area for SSA. 2G networks are widespread and 3G networks have grown rapidly since 2008 [17], [18]. The remote data captured in this project focuses on environmental data and technical data providing an indication of system usage and asset (primarily battery) health. Calculating the batteries' state of health prevents sustained overuse and substantial shortening of battery life. Battery usage can be assessed and managed to allow an even (more affordable) state of wear across the asset base. For community charging station solutions, as the operator becomes more technically astute in the operation of a PV charging station, more control can be devolved to them.



Fig. 2 - GSM coverage in The Gambia. Purple areas show GSM availability

Integrating asset optimization with remote condition monitoring allows system designers and developers to have more access to the asset

deterioration data, meaning they can improve system designs for the future and can assist the operator in the system's operation while not requiring a physical presence at the installation. The system hardware is capable of receiving data from a remote microcontroller over GSM/GPRS networks, calculating batteries state of health, disabled status, average loads over time, and updating a database of information for multiple charging stations. The Java server is then capable of sending data back to the charging station so that batteries can be updated.

A web application has been developed that can show the information in the database in a user-friendly manner (data presented depends on viewer, with different levels of information available to system users, operators, maintenance technicians and designers), using charts and tables where appropriate (Fig. 3.).



Fig. 3 - Example of System Information Displays

Finally, an android mobile application has been created and tested in preparation of the spread of android phones in SSA in the future. It can scan a QR code that is linked to a specific consumer battery and show data from the server's database about the battery ID that is included in the code. The user can receive updates on the condition, life, and amount of charge left in their battery (in hours or days) via this. Based on the condition and usage data received, the charging station operator can potentially remotely disable batteries. It is envisaged that this RM system will offer technical, economic and business information to help manage the lifecycle and asset condition of both individual and regional systems. Different levels of data and remote control (i.e., enable, disable battery assets) will be available depending on the user log on details (e.g., user, operator or designer). By conducting computations on the server from the data received the RM unit can be reduced in terms of specification, power consumption and costs. An additional benefit from this approach is that algorithms can be updated remotely and using a bidirectional communications link control signals

can be sent back to particular systems with updates being applied when the asset is next used/charged.

Zambia - Shoe-string data gathering and open access technologies

The project in Zambia was not unlike many others with a very limited budget and primarily focused on a narrow research scope. A shoe-string monitoring approach was implemented that would, over the course of the 12-month monitoring period, cost only around USD \$150. An SMS phone was chosen over an internet phone based on cost. Initial cost of the phone was around USD \$13 with no monthly fee, and international text messages are USD \$0.10. Monthly costs of an internet phone would have been prohibitive for the project. The measurement campaign was underway from August 2012 onwards.

The technology consisted of:

- An inexpensive SMS phones
- A simple manual monitoring process using a digital multi-meter
- Operator training
- A simple software service for receiving the SMS messages

The operator (and beneficiary of the wind turbine) was trained to take measurements daily (morning, midday, night) for several metrics (Table II). Each recording would be recorded as a line in a log-book. A small control box was built and installed along with the wind turbine which measured system voltage and charging current with analogy meters. To record a measurement the operator would log the time of day and the measurements from the control box. He would then use a multimeter to measure wind speed using a frequency measurement from an installed anemometer. The whole process takes around 5 minutes to complete. When complete, three lines (i.e., one day of measurements) would be sent via SMS to a US phone number.

TABLE II

SELECTED REPORTED MEASUREMENTS

Metric	Measured by
Wind speed	Anemometer (Hertz)
Battery voltage	Digital multimeter
Wind Charging current	Analog ammeter
Date, time	Clock

A software system was set up to receive, validate, and collect the data submissions.

The software system consists of:

- An account on twilio.com for sending and receiving SMS messages, including the rental of one phone number
- An Amazon Web Services (AWS) Elastic Compute Cloud (EC2) server. AWS provides very small servers in a free pricing tier, and this “micro” sized server is thus free of charge.
- Support users with SMS phone numbers. Each support user receives a broadcast of any help messages or data errors entered into the system. The custom software is a very simple program consisting of only 100 lines - yet it provides a responsiveness that no human could produce. At any time of day, it responds within 20 seconds or so that there has been an error in the data recording, at a time when such errors can still be corrected. The program records all data received, valid or not, along with whether the program deemed it to be valid. Future versions of the program could have more advanced error handling. At any time, the data recorded to date can be retrieved by a simple web page. Total operating cost of the software system has been around \$40 for a half year. Total development time of the software system was around 8 hours

The software system required support for a total of about 12 hours. The automated system will be supported in the future so that it can record the entire dialogue between the operator and the help users. While there are other options, such a radio-based system, which would have produced data of a higher quality and quantity, a support operator-driven data gathering system has additional benefits. Money cannot purchase education, accountability, or engagement, yet all three were in abundance after switching to a lower-tech data collection strategy. For a project implementation strategy that couldn't commit to a year of on-the-ground support, ease of execution was also crucial. This application demonstrates the capabilities to monitor micro-energy projects remotely using free services and at minimal costs.

A longer evaluation period is needed to determine whether this approach is more effective in improving sustainability of like projects. The weaknesses experienced to date include a likely lack of accuracy, gaps in the data set, and monitoring system breakdown (anemometer wire). However, as a pragmatic solution, there are

benefits to the implementing team. First, for a project without dedicated in-country monitor, this allows the project team to gather data from afar. Second, a direct communication line is available for the project team to speak with the operator which improved accountability and engagement. Third, daily data uploads that are transparent and instantaneously available; the project team can react quickly if there is a gap in SMS or for an error (i.e., system failure). Fourth, the monitoring system uses widely available and extremely affordable tools. Fifth, costs for collecting data, around USD \$150/year, are much reduced over alternatives; recovering the data in a log book form would require, at minimum, an international post and more likely an international flight.

CONCLUSIONS

The current deployments of RM in Malawi, Zambia, and the Gambia are variants on a common theme of deploying acceptable technologies to support the monitoring of RET systems in developing nations. A viable route to enhanced sustainability is the usefulness of precise and nearly real-time system monitoring of RET deployments. Technically speaking, RM implementation technology is available and supported by an expanding international community of engineers and professionals.

REFERENCES

- [1] *Sustainable Energy for All*. 15 March 2012. <<http://www.sustainableenergyforall.org/>>
- [2] *August 2012 IMF Country Report No. 12/222, Malawi: Poverty Reduction Strategy Paper*
- [3] *Birol, Fatih. "World Energy Outlook 2012." International Energy Agency (IEA), Paris (2012).*
- [4] *World Bank. Independent Evaluation Group, ed. The Welfare Impact of Rural Electrification: A Reassessment of the Costs and Benefits: an IEG Impact Evaluation. World Bank Publications, 2008.*
- [5] *REEEP Policy Database – Gambia. 23 May 2013.*
- [6] *Practical Action (2013) Poor people's energy outlook 2013, Rugby, UK: Practical Action Publishing.*
- [7] *Bernard, Tanguy. "Impact analysis of rural electrification projects in sub-Saharan Africa." The World Bank Research Observer 27.1 (2012): 33-51.*
- [8] *Government of the Republic of Zambia, "Rural Electrification Master Plan for Zambia 2008 – 2030", Feb. 2009.*

[9] Barnes, Douglas F., ed. *The challenge of rural electrification: strategies for developing countries*. Rff Press, 2007.

[10] IOD PARC, June, 2012. *Evaluation of Off-grid Community Managed Renewable Energy Projects in Malawi: As part of the Institutional Support Program of Malawi Renewable Energy Acceleration Program (MREAP)*. Glasgow, Scotland.

[11] UNDP, HDR. "Human Development Report, Sustainability and equity: a better future for all [On line]." (2011).

[12] Frame, D.; Tembo, K.; Dolan, M.J.; Strachan, S.M.; Ault, G.W., "A community based approach for sustainable off-grid PV systems in developing countries," *Power and Energy Society General Meeting, 2011 IEEE*, vol., no., pp.1,7, 24-29 July 2011

[13] 2008 World Bank *Designing Sustainable Off-Grid Rural Electrification Projects: Principles and Practices*

[14] Simon Bawakyillenuo, *Deconstructing the dichotomies of solar photovoltaic (PV) dissemination trajectories in Ghana, Kenya and Zimbabwe from the 1960s to 2007*, *Energy Policy*, Volume 49, October 2012, Pages 410-421, ISSN 0301-4215, 10.1016/j.enpol.2012.06.042.

[15] Collins, Daryl. *Portfolios of the poor: how the world's poor live on \$2 a day*. Princeton University Press, 2009.

[16] GSMA, *Sub-Saharan Africa Mobile Observatory 2012*, 2012.

[17] World Bank and African Development Bank, "The Transformational Use of Information and Communication Technologies in Africa", 2012.

[18] Pathan, A-SK, Choong Seon Hong, and Hyung-Woo Lee. "Smartening the environment using wireless sensor networks in a developing country." *Advanced Communication Technology, 2006. ICACT 2006. The 8th International Conference. Vol. 1. IEEE, 2006*.

[19] Mafuta, Million, et al. "Successful Deployment of a Wireless Sensor Network for Precision Agriculture in Malawi." (2012).

[20] Nkoloma, M., M. Zennaro, and A. Bagula. "SM2 : Solar monitoring system in Malawi." *Kaleidoscope 2011: The Fully Networked HumanInnovations for Future Networks and Services (K-2011), Proceedings of ITU. IEEE, 2011*.

[21] Schelling, Nahana, et al. "Simbalink: Towards a sustainable and feasible solar rural electrification system." *Proceedings of the 4th ACM/IEEE International Conference on Information and Communication Technologies and Development. ACM, 2010*.